

FUJI LEAK NOISE LOGGER SYSTEM

LNL-1 FUJI LEAK NETS

Leakage control is being shifted from survey to monitoring. The unusual pipeline can be found by 3-process-step of the installation, the patrol and the analysis.



Analyzer

Logger



Instruments for the location of underground utilities and water leaks.

FUJI TECOM INC.


FUJI LEAK NOISE LOGGER SYSTEM

LNL-1 FUJI LEAK NETS

FEATURES

LNL-1 is an acoustic data logger system designed for detecting and monitoring leakage on water pipelines.

- LOGGERS, equipped with high sensitivity sensor are deployed on pipe fittings such as valves, fire hydrants. The loggers record "minimum noise level" at the points of the certain intervals.
- ANALYSER, The recorded data are downloaded by radio communication by Analyser. And the Analyser shows us 3 levels of leak possibilities at any given thresholds.
- SOFTWARE, The PC software identifies each logger and visualizes it on the map. The results of Minimum Noise Level are indicated by each areas or blocks. The results are displayed as graph. Temporal sound change also displayed as a graphical chart.

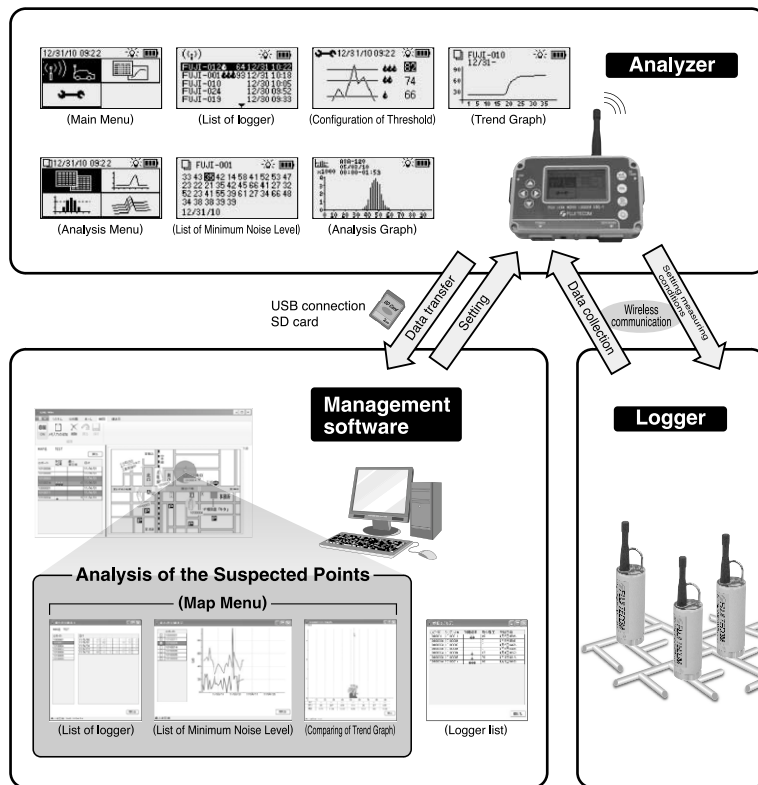

COMPONENT

■ Standard components

- | | | | |
|-----------------------|----|---------------------------------|---|
| ① Analyzer | 1 | ⑥ USB authentication key | 1 |
| ② SD card (2GB) | 1 | ⑦ USB cable | 1 |
| ③ Logger | 10 | ⑧ AC power supply adapter (12V) | 1 |
| ④ Storage case | 1 | ⑨ Operation manual | 1 |
| ⑤ Management software | 1 | ⑩ Warranty certificate | 1 |

■ Optional accessories

- ⑪ Additional loggers for expansional deployment (10 loggers/order)
- ⑫ Installation rope (Jigs for installation in deep end of water)
- ⑬ Storage case for additional loggers (Maximum 20 loggers can be contained.)
- ⑭ Power supply cable for use with automobile cigarette lighter socket

SPECIFICATIONS

■ Analyzer

- Power supply : Rechargeable lithium-ion battery
- Operating temperature range : -20 to 50°C
- Protection level : IP52
- Continuous operating time : 10 hours or more
- Charging time : About 3.5 hours
- Wireless communication : 433MHz band
- Memory : SD card (2GB)
- Number of saved data : 500 data (for 500 loggers)
- Dimensions and weight : 166(W)×40(D)×105(H)mm, About 560g (not including protrusion)

■ Logger

- Power supply : Lithium battery
- Sensor sensitivity : 1V/g
- Operating temperature range : -20 to 50°C
- Protection level : IP68 (water depth 2m)
- Continuous operating time : 8 years or more (+20°C)
*at our specified setting conditions
- Wireless communication : 433MHz band
- Memory : Nonvolatile ring memory
- Number of saved data : Max. 7,200 (measurement interval 1 sec.)
×35 days = 252,000
- Dimensions and weight : φ40(D)×115(H)mm. 400g

OPERATING ENVIRONMENT (recommended)

- OS : Microsoft Windows XP (SP2 or later), Windows Vista, Windows 7 (32-bit)
- PC : Processor : Intel Pentium II or superior processor
- Memory : 128MB or more
- Hard disk : Free space of 100MB or more
- Resolution : 800×600 pixel or more
- USB port : USB1.1 or later
- Microsoft Office Excel : Excel 2002 or later

We reserve the right to change specifications without prior notice.



Instruments for the location of underground utilities and water leaks.

FUJI TECOM INC.

Head office : 2-20, Kanda Sakuma-cho, Chiyoda-ku, Tokyo 101-0025, Japan
 TEL : +81-3-3862-3196 FAX : +81-3-3866-1979
 Web Site : <http://www.fujitecom.com/>
 E-Mail : kaigai@fujitecom.co.jp

Branch office : Sapporo, Sendai, Tokyo, Shinetsu, Nagoya, Osaka
 Hiroshima, Kyushu

Technical development & training center : Niiza

AGENT